

558, 214

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
9 December 2004 (09.12.2004)

PCT

(10) International Publication Number
WO 2004/107326 A2

(51) International Patent Classification⁷: **G11B 7/00**

(74) Agent: RÖGGLA, Harald; Philips Intellectual Property & Standards, Triester Strasse 64, A-1101 Vienna (AT).

(21) International Application Number:
PCT/IB2004/050802

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 28 May 2004 (28.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03101589.4 2 June 2003 (02.06.2003) EP

(71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

(72) Inventor; and

(75) Inventor/Applicant (for US only): EBERDORFER, Wolfgang [AT/AT]; Triester Strasse 64, A-1101 Vienna (AT).

[Continued on next page]

(54) Title: CONDITIONAL ACCESS TO STORE CONTENT USING NON-STANDARD MEDIA

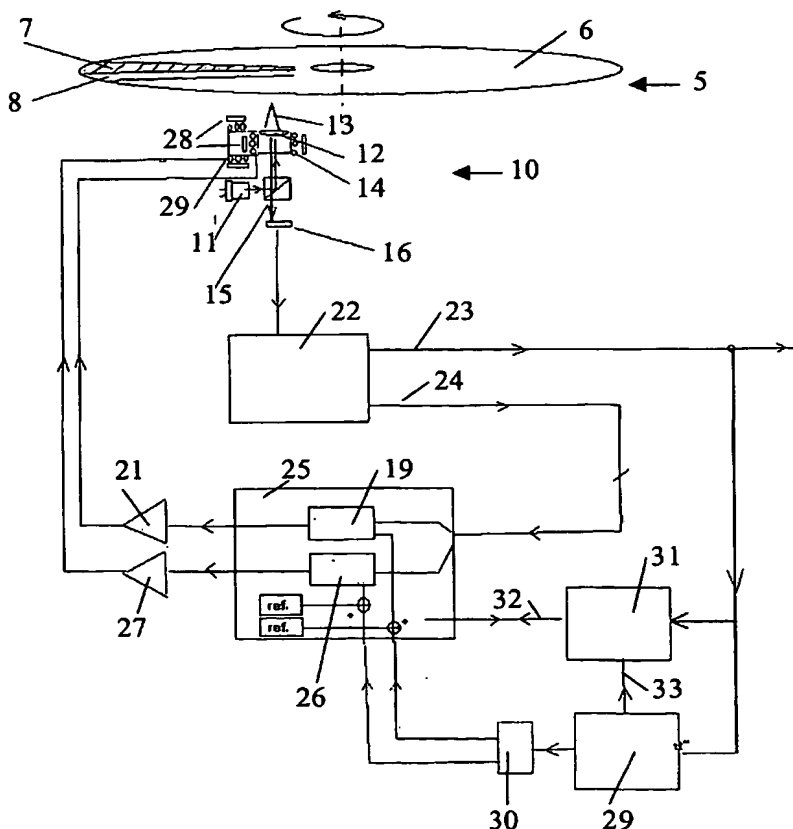

(57) Abstract: A data carrier with at least one data recording area (2, 6) in which data recording area data are stored in accordance with a predefined data recording standard, comprises at least one defective area (3, 7) in the data recording area (2, 6), which defective area is designed in such a way that it comes into conflict with at least one parameter of the predefined data recording standard, and further comprises at least one defect localization area (4, 8) containing position information on the position of the at least one defective area (3, 7) on the data carrier (1, 5).

WO 2004/107326 A2



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*